
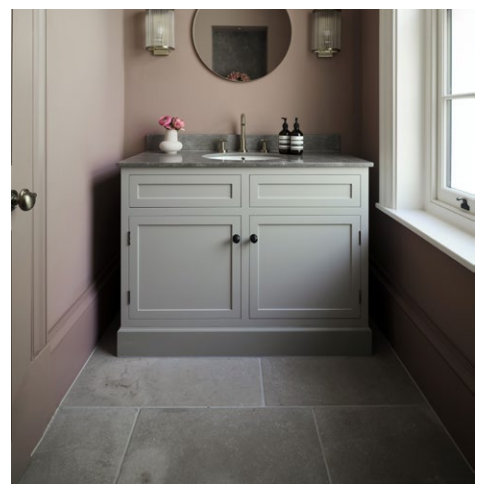


EIFFEL

LIMESTONE • TUMBLED

The powder-soft colouring and texture of this limestone makes it a perfect addition for a modern townhouse or country kitchen.



FORMAT (CM)

60 x Random x 2

AVAILABILITY

Usually in stock

PACK QUANTITY

21.9m²

Suitable for interior floors,
sealing required.

TECHNICAL DATA

TEST	STANDARD	RESULT
Apparent Density	BS EN 1936 : 2006	2440kg/m ³
Open Porosity	BS EN 1936 : 2006	8.3%
Water Absorption at Atmospheric Pressure	BS EN 13755 : 2008	3.6%
Flexural Strength (3 Point)	BS EN 12372 : 2006	17.4MPa
Frost Resistance (56 Cycles)	BS EN 12371 : 2010	16.7MPa
Abrasion Resistance	BS EN 14157 : 2004	22.0mm
Thermal Shock Resistance	BS EN 14066 : 2013	0.02%
Slip Resistance (Dry)	BS EN 14231 : 2003	PTV 66.75
Slip Resistance (Wet)	BS EN 14231 : 2003	PTV 47.8

- ✓ Suitable for use with underfloor heating
- ✓ Suitable for use in wet areas

For any further information or advice, please contact our team.

INSTALLATION, CARE & MAINTENANCE ADVICE

Please refer to the installation guides on our website.

PRODUCT NOTES

This product is particularly prone to efflorescence and moisture staining. To avoid this, make sure to store in a dry place, and use a chemical-curing adhesive suitable for natural stone, such as Ardex S28.