
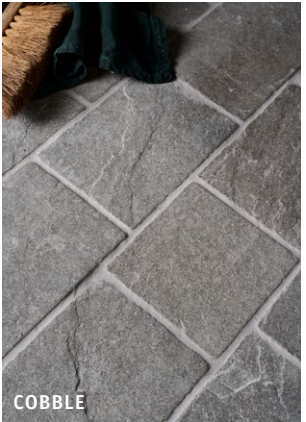



TYRONE

LIMESTONE • SEASONED

Rustic in character and rough around the edges, this extra strong flagstone looks gorgeous in a chic country kitchen and is perfect for an al fresco dining space.

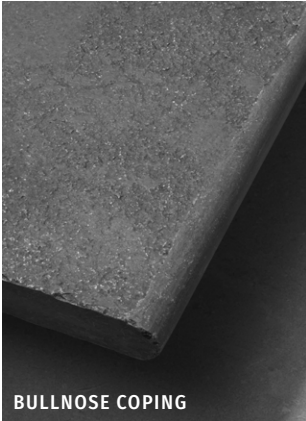

OPTION	FORMAT (CM)	AVAILABILITY	
Paving	60 x 90 x 2	Usually in stock	Suitable for interior and exterior floors, pool surrounds, sealing required.
Bullnose coping	40 x 100 x 4cm	Usually in stock	
Cobble	13 x Random x 2cm	Usually in stock	
Parquet	7.5 x 30 x 2cm	Usually in stock	



TECHNICAL DATA

Petrographic Analysis

Grey to brown/grey, mainly very fine grained LIMESTONE, hard, robust and well to very well indurated (subjective assessment). Exhibiting faint to very faint slightly convoluted bedding, in the sub-millimeter scale, running along the thickness of the slab sample (i.e. parallel to the principle surfaces).

TEST	STANDARD	RESULT
Apparent Density	BS EN 1936 : 2006	2710kg/m ³
Open Porosity	BS EN 1936 : 2006	0.2%
Water Absorption at Atmospheric Pressure	BS EN 13755 : 2008	0.1%
Flexural Strength (3 Point)	BS EN 12372 : 2006	38.8MPa
Frost Resistance (56 Cycles)	BS EN 12371 : 2010	35.8MPa
Thermal Shock Resistance	BS EN 14066 : 2013	38.5MPa
Abrasion Resistance	BS EN 14157: 2004	22mm
Slip Resistance (Dry)	BS EN 14231 : 2003	PTV 78
Slip Resistance (Wet)	BS EN 14231 : 2003	PTV 55

- ✓ Suitable for use with underfloor heating
- ✓ Suitable for use in wet areas
- ✓ Suitable for use in freezing temperatures

For any further information or advice, please contact our team.

INSTALLATION, CARE & MAINTENANCE ADVICE

Please refer to the installation guides on our website.

PRODUCT NOTES

When used externally, the appearance of this stone will change over time. For more information on this, please see the info sheet 'Understanding Weathering of Natural Stone' on our website.