
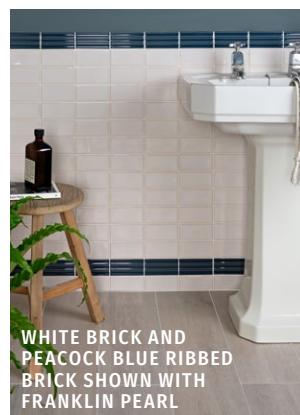



TUNSTALL

CERAMIC • GLOSS

Taking its cue from the classics, Tunstall evokes the richly toned puddle glaze effect that was popularised by the British ceramics industry during the Victorian era. With three formats and a range of contemporary tones, Tunstall can be installed in many different ways to create dramatic and authentic interiors.

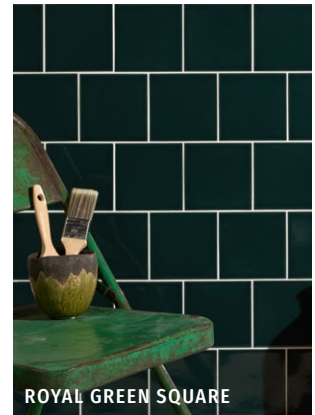

| OPTION | FORMAT (CM) | SOLD BY | AVAILABILITY | |
|--------------|------------------|----------------------------------|------------------|------------------------------|
| SQUARE | 12.5 x 12.5 x 1 | 32 pieces (0.5m ²) | Usually in stock | Suitable for interior walls. |
| BRICK | 6.2 x 12.5 x 1 | 64 pieces (0.496m ²) | Usually in stock | |
| FLUTED BRICK | 6.2 x 12.5 x 1.2 | 56 pieces (0.434m ²) | Usually in stock | |





TECHNICAL DATA

| TEST | STANDARD | RESULT |
|--|-----------------|----------------------------|
| Dimensional Tolerances | EN ISO 10545-2 | Within standard tolerances |
| Water Absorption | EN ISO 10545-3 | >10% |
| Moldulus of Rupture | EN ISO 10545-4 | 15N/mm ² |
| Resistance to Crazing | EN ISO 10545-11 | Resistant |
| Chemical Resistance - High Concentrations | EN ISO 10545-13 | GHA |
| Chemical Resistance - Households/Swimming Pool Chemicals | EN ISO 10545-13 | GA |
| Stain Resistance | EN ISO 10545-14 | 5 |
| Resistance to Fire | EN 9239-1 | A |

Rectified: YES NO

For any further information or advice, please contact our team.

INSTALLATION, CARE & MAINTENANCE ADVICE

Please refer to the installation guides on our website.