
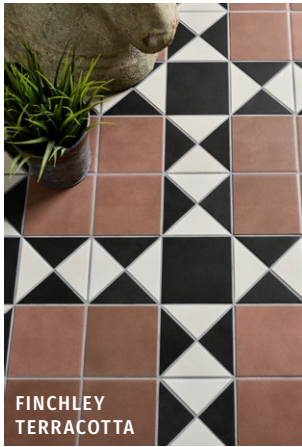


VICTORIAN STYLE™ FLOOR

PORCELAIN • MATT

Boldly-toned patterned floors are synonymous with the Victorian era, but can be difficult and expensive to source - but our Victorian Style™ floor collection gives all the style and effect of the original mosaic style in a prescored tile format - for quick and easy Victorian perfection.

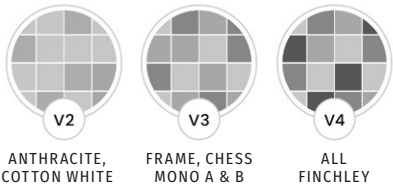


FORMAT (CM)	SOLD BY	AVAILABILITY	
28 x 28 x 0.85	10 pieces (0.784m ²)	Usually in stock	Suitable for interior and domestic exterior walls and floors. Slip rating: R10, PTV +36 when wet




CHESS MONO A



CHESS MONO B



ANTHRACITE




COTTON WHITE




FRAME



FINCHLEY
SOFT GREY




FINCHLEY
SKY BLUE




FINCHLEY
SANDSTONE



FINCHLEY
FOREST GREEN



FINCHLEY
COTTON WHITE



FINCHLEY
TERRACOTTA

TECHNICAL DATA

TEST	STANDARD	RESULT
Dimensional Tolerances	EN ISO 10545-2	Within standard tolerances
Water Absorption	EN ISO 10545-3	≤0.5%
Moldulus of Rupture	EN ISO 10545-4	35N/mm ²
Superficial Abrasion Resistance	EN ISO 10545-7	Class 3
Resistance to Cracking	EN ISO 10545-11	Resistant
Frost Resistance	EN ISO 10545-12	Resistant
Chemical Resistance - High Concentrations	EN ISO 10545-13	GHA
Chemical Resistance - Households/Swimming Pool Chemicals	EN ISO 10545-13	GA
Stain Resistance	EN ISO 10545-14	5
Resistance to Fire	EN 9239-1	A1
Slip Rating	DIN 51130	Class 2
Slip Rating - Barefoot	DIN 51130	R10
Dynamic Coefficient of Friction	ANSI A137	>0.42

Rectified: YES NO

For any further information or advice, please contact our team.

INSTALLATION, CARE & MAINTENANCE ADVICE

Please note that we recommend the use of our Sarsen Home Porcelain Pre-Grout Barrier with this product to avoid any grout stains on the tile surface. Please refer to the installation guide on the website for these lines. .

PRODUCT NOTES

Medium slip risk: This should not be used on pool surrounds and should be kept clean to maintain slip resistance.