

WOODLAND GLADE

PORCELAIN • MATT

This tile really awakens the senses, capturing the tones and silhouettes of native leaves, plants and flowers. With a blend of designs and a soft, organic green backdrop, this tile comes randomly mixed in the box and can be used on walls and floors.



FORMAT (CM)

21.5 x 24.5 x 0.8

SOLD BY


24 pieces (0.948m²)


AVAILABILITY

Usually in stock

Suitable for interior and domestic exterior walls and floors.

Slip rating: R10, PTV +36 when wet



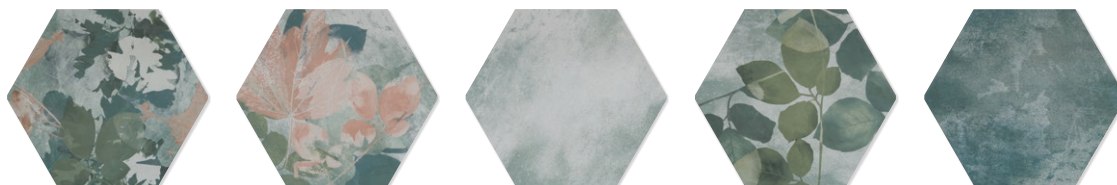

EXAMPLE TILES

TECHNICAL DATA

TEST	STANDARD	RESULT
Dimensional Tolerances	EN ISO 10545-2	Within standard tolerances
Water Absorption	EN ISO 10545-3	<0.5%
Modulus of Rupture	EN ISO 10545-4	>35N/mm ²
Thermal Shock Resistance	EN ISO 10545-9	Resistant
Resistance to Crazeing	EN ISO 10545-11	Resistant
Frost Resistance	EN ISO 10545-12	Resistant
Chemical Resistance - Low Concentration	EN ISO 10545-13	GLA
Chemical Resistance - Households/Swimming Pool Chemicals	EN ISO 10545-13	GA
Stain Resistance	EN ISO 10545-14	5
Resistance to Fire	EN 9239-1	A1
Slip Rating - Critical Angle	DIN 51097	B
Slip Rating - Barefoot	DIN 51130	R10
Slip Rating	BS 7976-2	PTV +36 (Wet)
Dynamic Coefficient of Friction	ANSI A137	≥0.42

Rectified: YES NO

For any further information or advice, please contact our team.

INSTALLATION, CARE & MAINTENANCE ADVICE

Please refer to our 'Understanding Unrectified Porcelain Tiles' sheet on our website for product installation advice.

PRODUCT NOTES

Medium slip risk: This should not be used on pool surrounds and should be kept clean to maintain slip resistance.