
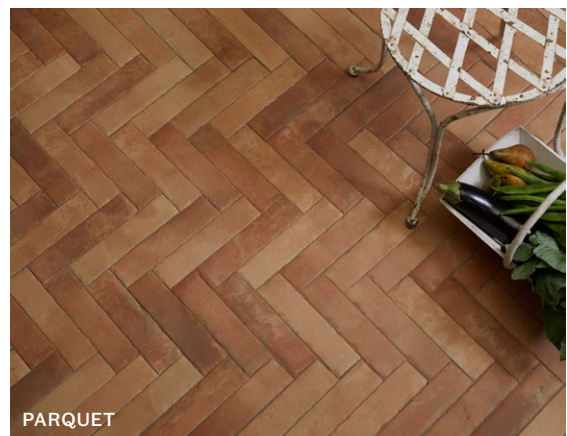
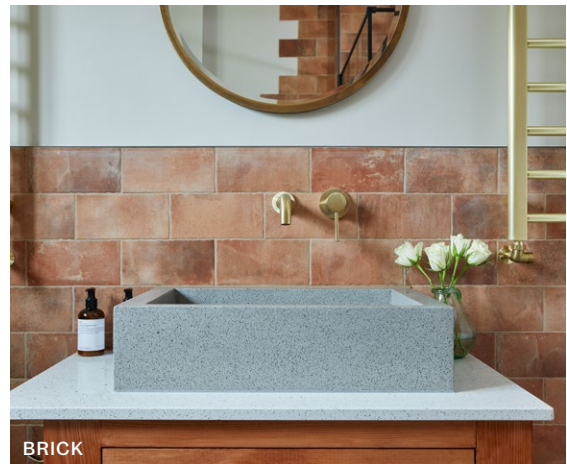


# BREWHOUSE

PORCELAIN - TEXTURED

Bring the aged look of terracotta into your home with these durable, low maintenance porcelain tiles inspired by the brewhouse at Moseley Old Hall.



OPTION	FORMAT (CM)	SOLD BY	AVAILABILITY	NOTES
Parquet	6.5 x 25 x 1	27 pieces (0.438m <sup>2</sup> )	Usually in stock	Suitable for interior and exterior walls and floors.
Brick	11 x 22.5 x 1	20 pieces (0.495m <sup>2</sup> )	Usually in stock	
Square	22.5 x 22.5 x 1	20 pieces (1.012m <sup>2</sup> )	Usually in stock	
Rectangle	22.5 x 45 x 1	10 pieces (1.012m <sup>2</sup> )	Usually in stock	



PARQUET



RECTANGLE



BRICK



SQUARE

## TECHNICAL DATA

TEST	STANDARD	RESULT
Dimensional Tolerances	EN ISO 10545-2	Within standard tolerances
Water Absorption	EN ISO 10545-3	0.1%
Modulus of Rupture	EN ISO 10545-4	37N/mm <sup>2</sup>
Superficial Abrasion Resistance	EN ISO 10545-7	Class 3
Resistance to Crazeing	EN ISO 10545-11	Resistant
Frost Resistance	EN ISO 10545-12	Resistant
Chemical Resistance - High Concentrations	EN ISO 10545-13	GHA
Chemical Resistance - Low Concentrations	EN ISO 10545-13	GLA
Chemical Resistance - Households/Swimming Pool Chemicals	EN ISO 10545-13	GA
Stain Resistance	EN ISO 10545-14	Class A
Resistance to Fire	EN 9239-1	A1
Hardness (MOHS)	UNE 67101	9
Slip Rating - Critical Angle	DIN 51097	Class 3
Slip Rating - Barefoot	DIN 51130	R12
Slip Rating	BS 7976-2	PTV 60.1 (Wet) PTV 70.9 (Dry)

Rectified: YES  NO

For any further information or advice, please contact our team.

## INSTALLATION, CARE & MAINTENANCE ADVICE

Please refer to our 'Understanding Unrectified Porcelain Tiles' sheet on our website for product installation advice. Please note that we recommend the use of our Sarsen Home Porcelain Pre-Grout Barrier with this product to avoid any grout stains on the tile surface.

