


BRIT STONE

PORCELAIN - MATT OR TEXTURED

Previously known as Albion

A collection of three effortless and versatile porcelain tiles.



PENNANT



BURFORD



MINSTER



PENNANT PAVING






BURFORD PAVING



MINSTER PAVING

OPTION	FORMAT (CM)	SOLD BY	AVAILABILITY	NOTES
Minster, Burford, Pennant*	60 x 90 x 1	3 pieces (1.62m ²)	Usually in stock	1cm thick tiles: Suitable for interior floors and walls. Paving: Suitable for exterior floors.
Paving (all shades)	60 x 90 x 2	Piece (0.54m ²)	Usually in stock	

*Please note: Burford was previously known as Chalfont, Minster was known as Buxton and Pennant was known as Langton.

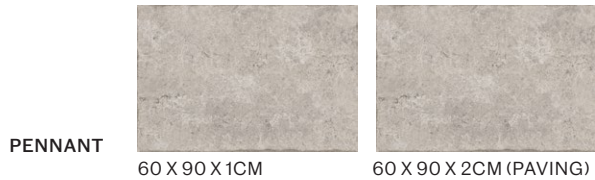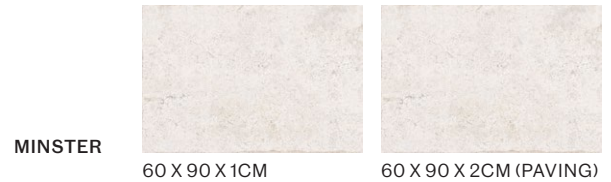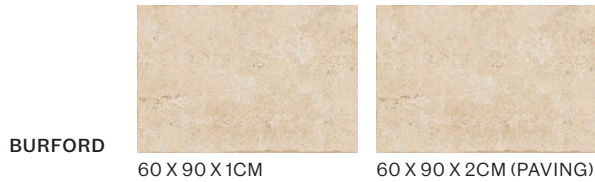

TECHNICAL DATA

TEST	STANDARD	RESULT
Nominal Size	-	Nominal size: 60 x 90cm
Final Rectified Size	-	59.7 x 89.6cm
Dimensional Tolerances	EN ISO 10545-2	Within standard tolerances
Water Absorption	EN ISO 10545-3	≤0.1%
Modulus of Rupture	EN ISO 10545-4	≥35N/mm ²
Breaking Strength	EN ISO 10545-4	≥1300N
Deep Abrasion Resistance	EN ISO 10545-6	≤140mm ³
Superficial Abrasion Resistance	EN ISO 10545-7	Class 4
Linear Thermal Expansion	EN ISO 10545-8	<-9.0 x 10 ⁻⁶ K ⁻¹
Thermal Shock Resistance	EN ISO 10545-9	Resistant
Frost Resistance	EN ISO 10545-12	Resistant
Chemical Resistance - High Concentrations	EN ISO 10545-13	HA
Chemical Resistance - Low Concentration	EN ISO 10545-13	LA
Chemical Resistance - Households/Swimming Pool Chemicals	EN ISO 10545-13	A
Stain Resistance	EN ISO 10545-14	5
Resistance to Fire	EN 9239-1	A1
Slip Rating - Critical Angle	DIN 51097	Paving: A+B+C
Slip Rating - Barefoot	DIN 51130	Paving: R11 1cm thick tiles: R9
Slip Rating	BS 7976-2	Paving: PTV +36 (Wet)
Dynamic Coefficient of Friction	ANSI A137	Paving: >0.62

Rectified: YES NO

For any further information or advice, please contact our team.

INSTALLATION, CARE & MAINTENANCE ADVICE

Please refer to the installation guides on our website.



CA' PIETRA

CAPIETRA.COM