
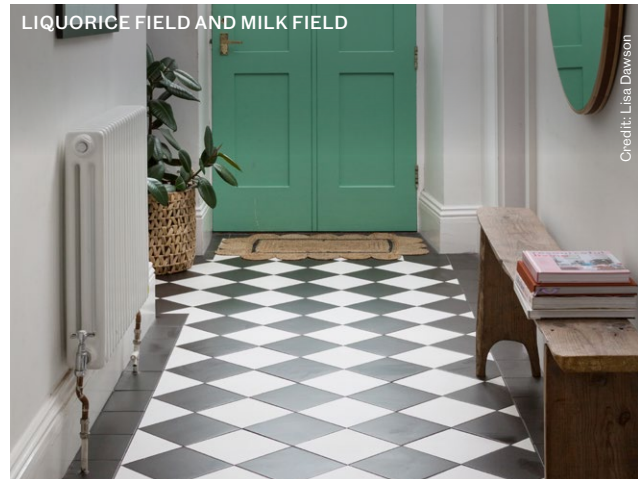


BROMPTON

PORCELAIN • MATT

Our Brompton porcelain range will add period charm and glamour to your home. Use for patios, paths or bring the Victorian look into your home by laying it in hallways, kitchens, conservatories and bathrooms. It is ideal for high traffic areas thanks to its durable porcelain design.

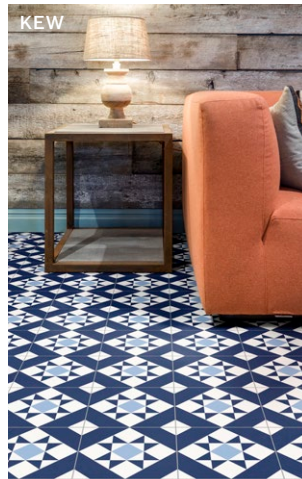

OPTION	FORMAT (CM)	SOLD BY	AVAILABILITY	NOTES
Plain Field	20 x 20 x 0.9	15 pieces (0.6m ²)	Usually in stock	Suitable for interior and domestic exterior walls and floors.
Patterned	20 x 20 x 0.9	15 pieces (0.6m ²)	Usually in stock	



BOROUGH



KEW



GREENWICH




KENSINGTON



CLARENCE



LIQUORICE FIELD



MILK FIELD

TECHNICAL DATA

TEST	STANDARD	RESULT
Dimensional Tolerances	EN ISO 10545-2	Within standard tolerances
Water Absorption	EN ISO 10545-3	≤0.5%
Modulus of Rupture	EN ISO 10545-4	≥35N/mm ²
Breaking Strength	EN ISO 10545-4	≥1300N
Superficial Abrasion Resistance	EN ISO 10545-7	Class 3
Thermal Shock Resistance	EN ISO 10545-9	Resistant
Resistance to Crazeing	EN ISO 10545-11	Resistant
Frost Resistance	EN ISO 10545-12	Resistant
Chemical Resistance - High Concentrations	EN ISO 10545-13	GHA
Stain Resistance	EN ISO 10545-14	5
Resistance to Fire	EN 9239-1	A1
Slip Rating	DIN 51130	Class 2
Slip Rating - Barefoot	DIN 51130	R10
Slip Rating	BS 7976-2	PTV +36 (Wet)
Dynamic Coefficient of Friction	ANSI A137	>0.42

Rectified: YES NO

For any further information or advice, please contact our team.

INSTALLATION, CARE & MAINTENANCE ADVICE

Please refer to our 'Understanding Unrectified Porcelain Tiles' sheet on our website for product installation advice.

PRODUCT NOTES

Medium slip risk: This should not be used on pool surrounds and should be kept clean to maintain slip resistance.

These tiles are non-rectified, so to achieve a chequerboard effect, a 3mm grout joint is needed. Some tolerances on print quality are to be expected - please see our 'Understanding Digitally Printed Tiles' sheet for further information.



CA' PIETRA

CAPIETRA.COM