


BRUTON

LIMESTONE - SEASONED


A beautifully rugged stone that brings a sense of permanence and natural warmth to outdoor spaces. Its colour palette moves effortlessly from warm beige through soft greys and greige to occasional flashes of tan, creating a variegated surface that feels both authentic and deeply architectural in tone.



SOLID STEPS




PITCHERS

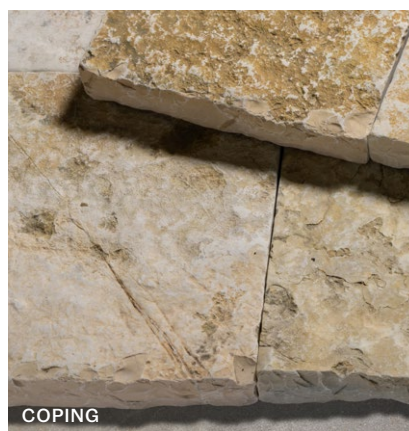

COPING



PAVERS

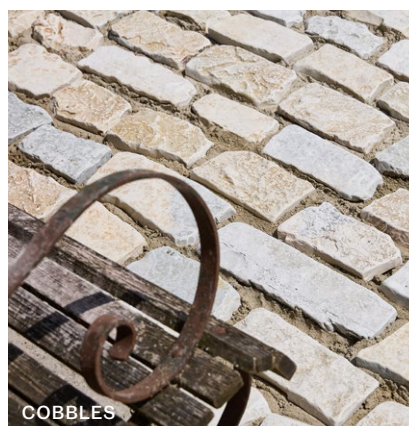

COBBLES

OPTION	FORMAT (CM)	SOLD BY	AVAILABILITY	NOTES
Solid Steps	35 x 100 x 15-18	Sold by piece	Usually in stock	Suitable for interior and exterior floors, sealing required.
Coping	40 x Random x 5-7	Linear mtr	Usually in stock	
Cobbles	10-12 x Random x 3	Crate (10m ²)	Usually in stock	
Pitchers	4-12 x Random x 3	Crate (10m ²)	Usually in stock	
Pavers	35 x Random x 3	Linear mtr (0.35m ²)	Usually in stock	

TECHNICAL DATA

Petrographic Description

Limestone comprising of 92% Calcite and 6-7% Quartz.

TEST	STANDARD	RESULT
Apparent Density	EN 1936	2667.6 kg/m ³
Open Porosity	EN 1936	0.1%
Water Absorption At Atmospheric Pressure	EN 13755	0.3%
Water Absorption by capillarity	EN 1925	0.5g / m ² vS
Water Vapour Permeability	EN 12572	2.7 * 10 ⁻¹² g / cm ² d-1
Compressive Strength	EN 1926	114.74MP
Abrasion Resistance	EN 14157	2.82mm
Frost Resistance	EN 12371	Resistant (50 cycles)
Resistance to Fire	EN 9239-1	A1
Slip Resistance (Dry)	BS EN 14231 : 2003	PTV 91.2
Slip Resistance (Wet)	BS EN 14231 : 2003	PTV 88.5

- ✓ Suitable for use in wet areas
- ✓ Suitable for use in freezing temperatures

For any further information or advice, please contact our team.

INSTALLATION, CARE & MAINTENANCE ADVICE

Please refer to the installation guides on our website.