


COTSWOLD

PORCELAIN - MATT OR TEXTURED

Previously known as Walcot

With warm beige tones reminiscent of Cotswold flagstones and delicate veining, this artfully aged-looking porcelain will create warmth and homeliness; perfect for hard-working homes.



60 X 90 X 1CM



PAVING

FORMAT (CM)

60 x 90 x 1 Matt
60.5 x 90.5 x 2 Textured (paving)

SOLD BY

2 pieces (1.08m²)
Piece (0.5475m²)

AVAILABILITY

Usually in stock
Usually in stock

NOTES


1cm thick tiles: Suitable for interior walls and floors.
Paving: Suitable for exterior paving and pool surrounds.

CA' PIETRA

CAPIETRA.COM



60 X 90 X 1CM
MATT

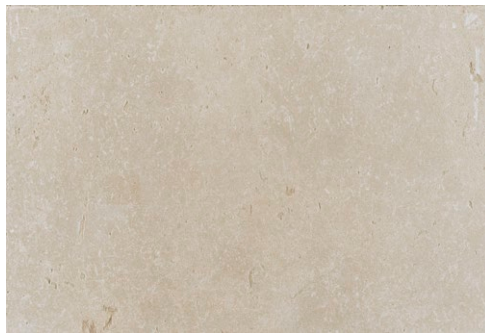

PAVING: 60.5 X 90.5 X 2CM
TEXTURED

TECHNICAL DATA

TEST	STANDARD	RESULT
Sizing	-	7
Dimensional Tolerances	EN ISO 10545-2	Within standard tolerances
Water Absorption	EN ISO 10545-3	1cm thick tiles: 0.22% Paving: $\leq 0.5\%$
Modulus of Rupture	EN ISO 10545-4	36N/mm ²
Breaking Strength	EN ISO 10545-4	1cm thick tiles: 1783N Paving: 7636N
Superficial Abrasion Resistance	EN ISO 10545-7	1cm thick tiles: Class 3 Paving: Class 4
Thermal Shock Resistance	EN ISO 10545-9	Resistant
Frost Resistance	EN ISO 10545-12	Resistant
Chemical Resistance - High Concentrations	EN ISO 10545-13	HA
Chemical Resistance - Low Concentration	EN ISO 10545-13	LA
Chemical Resistance - Households/Swimming Pool Chemicals	EN ISO 10545-13	A
Stain Resistance	EN ISO 10545-14	5
Resistance to Fire	EN 9239-1	A1
Slip Rating	DIN 51130	1cm thick tiles: Class 2
Slip Rating - Barefoot	DIN 51130	1cm thick tiles: R9 Paving: R11
Slip Rating	BS EN 14231: 2003	1cm thick tiles: PTV 65.4 (Dry), PTV 52.6 (Wet)

Rectified: YES ☐ NO ☒

For any further information or advice, please contact our team.

INSTALLATION, CARE & MAINTENANCE ADVICE

Please refer to our 'Understanding Unrectified Porcelain Tiles' sheet on our website for product installation advice.

UK
CA

CA' PIETRA

CAPIETRA.COM