
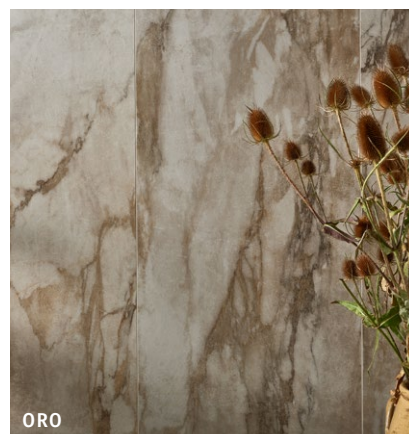
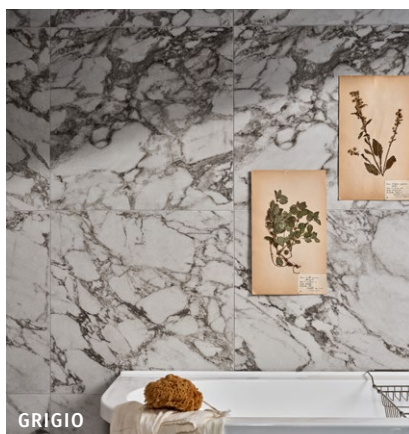
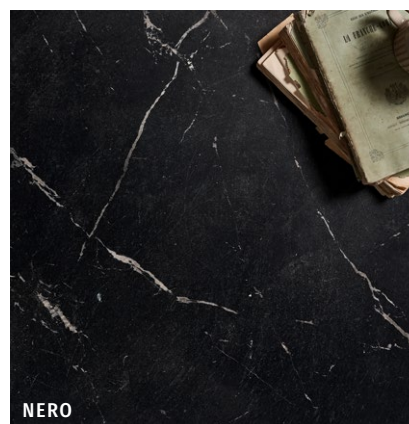


EAST VILLAGE

PORCELAIN - MATT


The lightly aged effect make East Village a dream to live with- hiding any dirt and giving a soft, natural effect. Ideal for standout chequerboards or stand-out, elegant styling- combine the mosaics and the tile together for maximum effect.

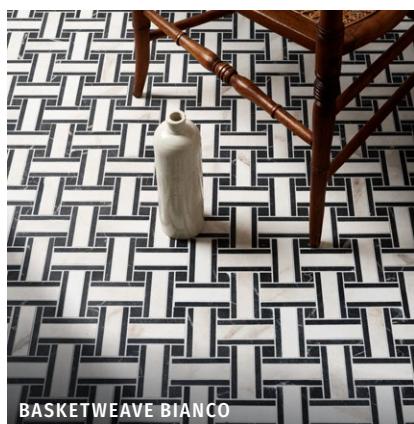

OPTION	FORMAT (CM)	SHEETS/M ²	SOLD BY	AVAILABILITY	NOTES
Bianco, Nero	29.5 x 29.5 x 1	-	11 pieces (0.99m ²)	Usually in stock	Suitable for interior walls and floors.
Bianco, Grigio, Nero, Oro	59.5 x 59.5 x 1	-	4 pieces (1.42m ²)	Usually in stock	
Bianco, Oro	59.5 x 119.2 x 1	-	2 pieces (1.42m ²)	Usually in stock	
Basketweave Mosaic: Bianco, Oro	31.5 x 31.5 x 1	10.08	Sheet	Usually in stock	
Quadrant Mosaic Oro	26 x 26 x 1	14.79	Sheet	Usually in stock	



BIANCO
29.5 X 29.5 X 1CM



NERO
29.5 X 29.5 X 1CM




BASKETWEAVE
MOSAIC BIANCO




BASKETWEAVE
MOSAIC ORO



QUADRANT
MOSAIC



BIANCO
59.5 X 59.5 X 1CM




GRIGIO
59.5 X 59.5 X 1CM



NERO
59.5 X 59.5 X 1CM



ORO
59.5 X 59.5 X 1CM

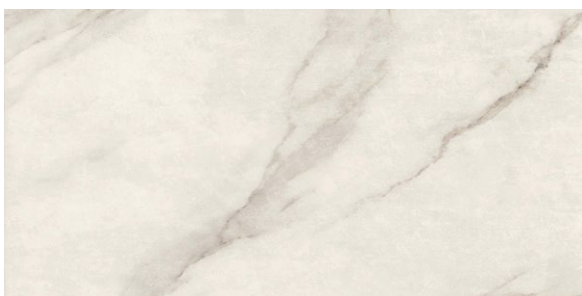

BIANCO
59.5 X 119.2 X 1CM



ORO
59.5 X 119.2 X 1CM

TECHNICAL DATA

TEST	STANDARD	RESULT
Sizing	-	Bianco 29.5 x 29.5 x 1.0cm: 112 Bianco 59.5 x 119.2 x 1.0cm: 14 Bianco 59.5 x 59.5 x 1.0cm: 28 Grigio 59.5 x 59.5 x 1.0cm: 22 Nero 29.5 x 29.5 x 1.0cm: 160 Nero 59.5 x 59.5 x 1.0cm: 40 Oro 59.5 x 119.2 x 1.0cm: 8 Oro 59.5 x 59.5 x 1.0cm: 16
Sizing	-	Nominal size: 30 x 30cm: Final rectified size: 29.65 x 29.65cm Nominal size: 60 x 120cm: Final rectified size: 59.5 x 119.2cm Nominal size: 60 x 60cm: Final rectified size: 59.5 x 59.5cm
Dimensional Tolerances	EN ISO 10545-2	Within standard tolerances
Water Absorption	EN ISO 10545-3	≤0.5%
Modulus of Rupture	EN ISO 10545-4	≥35N/mm ²
Breaking Strength	EN ISO 10545-4	>1300
Deep Abrasion Resistance	EN ISO 10545-6	<175mm ³
Linear Thermal Expansion	EN ISO 10545-8	8x10 ⁻⁶ C ⁻¹
Thermal Shock Resistance	EN ISO 10545-9	Resistant
Resistance to Crazeing	EN ISO 10545-11	Resistant
Frost Resistance	EN ISO 10545-12	Resistant
Chemical Resistance - High Concentrations	EN ISO 10545-13	B
Chemical Resistance - Low Concentration	EN ISO 10545-13	B
Chemical Resistance - Households/Swimming Pool Chemicals	EN ISO 10545-13	B
Stain Resistance	EN ISO 10545-14	3
Resistance to Fire	EN 9239-1	A1
Slip Rating - Barefoot	DIN 51130	R10
Dynamic Coefficient of Friction	ANSI A137	0.62

Rectified: YES ☒ NO ☐

For any further information or advice, please contact our team.

INSTALLATION, CARE & MAINTENANCE ADVICE

Please note that due to the mosaics in this range being mesh-mounted, we would advise the use of a resin-based adhesive.

Please refer to the installation guides on our website.

**UK
CA**

CA' PIETRA

CAPIETRA.COM