
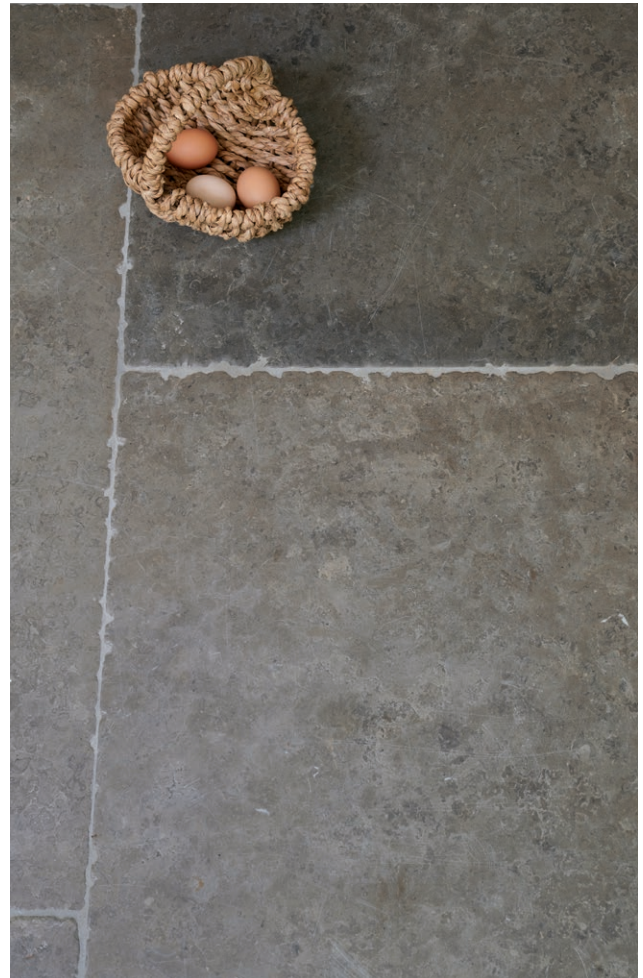


HAZLEBURY

LIMESTONE - SEASONED

Previously known as Hardwicke

This very hard graphite-toned limestone is really brought to life by the seasoned finish. The rough edges and textured surface means it will blend instantly into period properties, while the stylish grey tones make it a perfect fit for contemporary interiors.



FORMAT (CM)

60 x Random x 2

AVAILABILITY

Usually in stock

NOTES

Suitable for interior floors, sealing required.

TECHNICAL DATA

Petrographic Description

A mud-supported matrix with fine and medium grained micrite. A good proportion of the particles are tiny shells and much of the rest is very small particles of calcium carbonate. The matrix of sample is mainly sparite. There are some fossils abundant in the rock. This is a sedimentary carbonate rock.

TEST	STANDARD	RESULT
Apparent Density	BS EN 1936 : 2006	2642.6kg/m ³
Open Porosity	BS EN 1936 : 2006	2.4%
Water Absorption at Atmospheric Pressure	BS EN 13755 : 2008	0.91%
Flexural Strength (3 Point)	BS EN 12372 : 2006	8.43MPa
Frost Resistance (56 Cycles)	BS EN 12371 : 2010	71.8MPa
Abrasion Resistance	BS EN 14157 : 2004	23.1mm
Thermal Shock Resistance	BS EN 14066 : 2013	-0.1MPa
Slip Resistance (Dry)	BS EN 14231 : 2003	PTV 34.1
Slip Resistance (Wet)	BS EN 14231 : 2003	PTV 25.8

✓ Suitable for use with underfloor heating

For any further information or advice, please contact our team.

INSTALLATION, CARE & MAINTENANCE ADVICE

Please refer to the installation guides on our website.

PRODUCT NOTES

This product is prone to efflorescence. To avoid this, store in a dry area, and use rapid or semi-rapid set adhesive, such as our Sarsen Home Premium Semi-Rapid Adhesive.