



HAZLEBURY

LIMESTONE - TUMBLED & ETCHED

An atmospheric, variegated grey-brown limestone with boundless textural character, Hazlebury provides a peerless backdrop to paving spaces and internal floors alike.



60 X 60 X 2CM SHOWN WITH BUSCOT TUMBLED & ETCHED

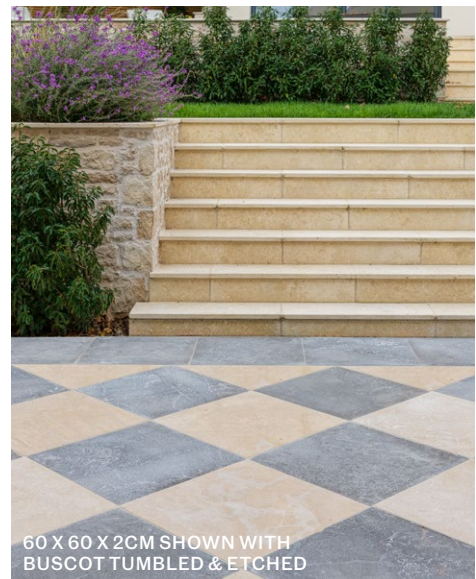

60 X 60 X 2CM SHOWN WITH
BUSCOT TUMBLED & ETCHED



KLINKERS

FORMAT (CM)

60 x 60 x 2
Klinkers 5 x 20 x 4

AVAILABILITY

Usually in stock
Usually in stock

NOTES

Suitable for interior walls and floors and external paving.
Klinkers suitable for external paving, driveways

TECHNICAL DATA

Petrographic Description

A mud-supported matrix with fine and medium grained micrite. A good proportion of the particles are tiny shells and much of the rest is very small particles of calcium carbonate. The matrix of sample is mainly sparite. There are some fossils abundant in the rock. This is a sedimentary carbonate rock.

TEST	STANDARD	RESULT
Apparent Density	BS EN 1936 : 2006	2642.6kg/m ³
Open Porosity	BS EN 1936 : 2006	2.4%
Water Absorption at Atmospheric Pressure	BS EN 13755 : 2008	0.91%
Flexural Strength (3 Point)	BS EN 12372 : 2006	8.43MPa
Frost Resistance (56 Cycles)	BS EN 12371 : 2010	71.8MPa
Abrasion Resistance	BS EN 14157 : 2004	23.1mm
Thermal Shock Resistance	BS EN 14066 : 2013	-0.1MPa
Slip Resistance (Dry)	BS EN 14231 : 2003	PTV 76.3
Slip Resistance (Wet)	BS EN 14231 : 2003	PTV 41.4

✓ Suitable for use with underfloor heating

For any further information or advice, please contact our team.

INSTALLATION, CARE & MAINTENANCE ADVICE

Please refer to the installation guides on our website.

PRODUCT NOTES

This product is prone to efflorescence. To avoid this, store in a dry area, and use rapid or semi-rapid set adhesive, such as our Sarsen Home Premium Semi-Rapid Adhesive.