
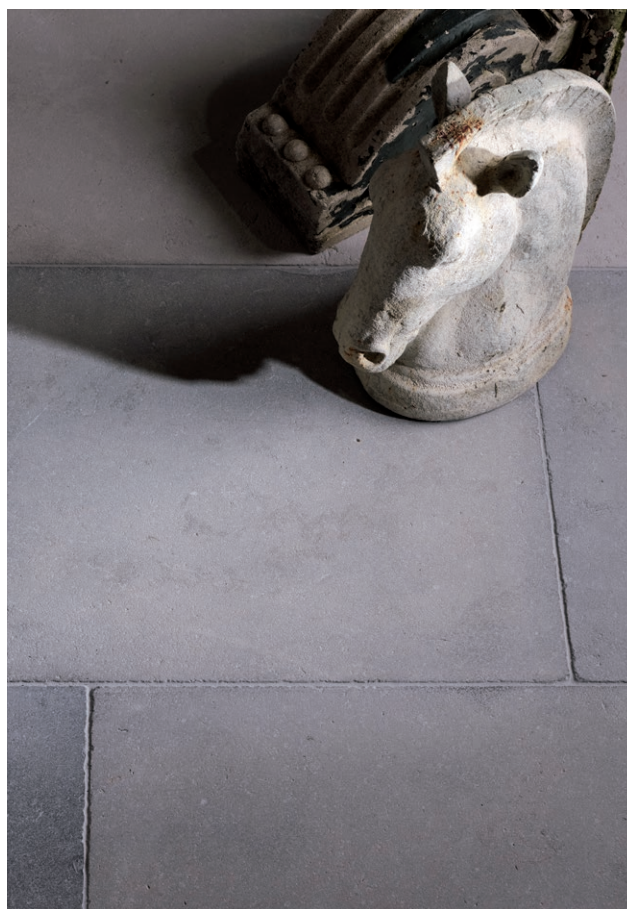


WAREHAM

LIMESTONE - TUMBLED & ETCHED

Previously known as Chaldon

Reminiscent of the grey pavers traditionally used in Cathedrals across England, the dappled look and high tonal variance is softened by a tumbled and etched finish, which also allows for external use.



FORMAT (CM)

40/50 x Random x 2

AVAILABILITY BY

Usually in stock

NOTES

Suitable for interior and exterior floors, sealing required.

Bespoke options available.

Use Kimmeridge Etched Copings alongside this product for the best match.

CA' PIETRA

CAPIETRA.COM

TECHNICAL DATA

Petrographic Description

Pale grey on to pale blue grey, with occasional to frequent in places brown and grey brown spots, up to 1.5mm and commonly less than 1mm across, associated with occasional to frequent, irregular voids up to 1.5mm and commonly less than 1mm across, unevenly distributed, medium to coarse-grained (grains were peloids and/or aggregations of peloids), up to 10mm across, well to moderately compacted, fresh LIMESTONE, generally hard and robust (subjective assessment). The sample exhibited stylolitic seams seen across the thickness and on the principle surfaces of the slab sample, with which the spots and voids were apparently associated.

TEST	STANDARD	RESULT
Apparent Density	BS EN 1936 : 2006	2627kg/m ³
Open Porosity	BS EN 1936 : 2006	0.91%
Water Absorption at Atmospheric Pressure	BS EN 13755 : 2008	0.92%
Flexural Strength (3 Point)	BS EN 12372 : 2006	15.90MPa
Frost Resistance (56 Cycles)	BS EN 12371 : 2010	13.00MPa
Thermal Shock Resistance	BS EN 14066 : 2013	16.2MPa
Abrasion Resistance	BS EN 14157 : 2004	18mm
Slip Resistance (Dry)	BS EN 14231 : 2003	PTV 57.7
Slip Resistance (Wet)	BS EN 14231 : 2003	PTV 46.4

- ✓ Suitable for use with underfloor heating
- ✓ Suitable for use in wet areas
- ✓ Suitable for use in freezing temperatures

For any further information or advice, please contact our team.

INSTALLATION, CARE & MAINTENANCE ADVICE

Please refer to the installation guides on our website.

PRODUCT NOTES

This product is prone to efflorescence. To avoid this, store in a dry area, and use rapid or semi-rapid set adhesive, such as our Sarsen Home Premium Semi-Rapid Adhesive. When used externally, the appearance of this stone will change over time. For more information on this, please see the info sheet 'Understanding Weathering of Natural Stone' on our website.

**UK
CA**

CA' PIETRA

CAPIETRA.COM