
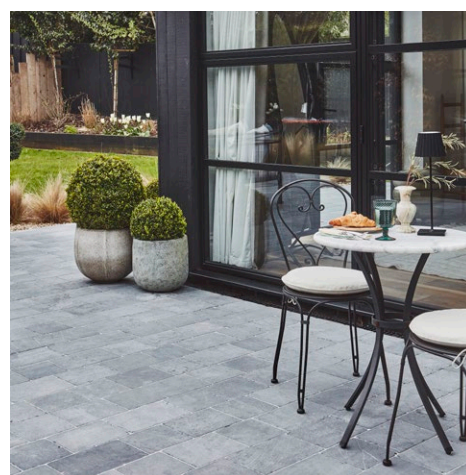


WEXFORD

LIMESTONE • TUMBLED

An extremely fine and hard limestone with inky, blue-black tones. The colour of these cobbles will vary with nature, depending on the light and whether they are dry or wet.

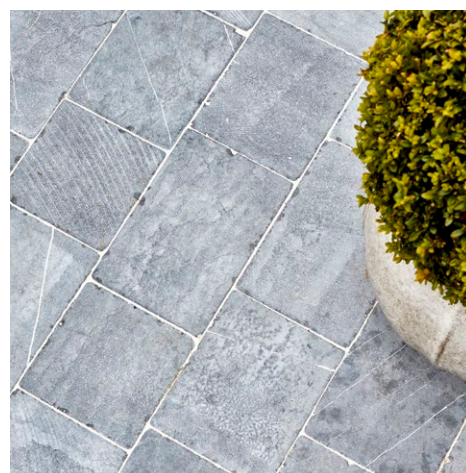

FORMAT (CM)

20 x Random x 2

AVAILABILITY

Usually in stock

Suitable for interior and exterior floors, pool surrounds, sealing required.



TECHNICAL DATA

Petrographic Details

Grey on diamond-sawn surfaces and broken dark grey to black on freshly broken surfaces, mainly very fine grained (calcisilite to calcilutite) limestone, well to very well compacted. Frequent stylolitic seams ran along the thickness of the sample, which were mainly tightly closed and exhibited a dark grey colouration possibly due to the presence of iron and/or manganese oxide. The stone is hard to very hard and robust and dense (subjective assessment).

TEST	STANDARD	RESULT
Apparent Density	BS EN 1936 : 2006	2730kg/m ³
Open Porosity	BS EN 1936 : 2006	0.3%
Water Absorption at Atmospheric Pressure	BS EN 13755 : 2008	0.1%
Flexural Strength (3 Point)	BS EN 12372 : 2006	23.3MPa
Frost Resistance (56 Cycles)	BS EN 12371 : 2010	18MPa
Abrasion Resistance	BS EN 14157 : 2004	19mm
Thermal Shock Resistance	BS EN 14066 : 2013	19.9MPa
Slip Resistance (Dry)	BS EN 14231 : 2003	PTV 64
Slip Resistance (Wet)	BS EN 14231 : 2003	PTV 52

- ✓ Suitable for use with underfloor heating
- ✓ Suitable for use in wet areas
- ✓ Suitable for use near heat sources
- ✓ Suitable for use in freezing temperatures

For any further information or advice, please contact our team.

INSTALLATION, CARE & MAINTENANCE ADVICE

Please refer to the installation guides on our website.