


BEACH HUT

PORCELAIN • MATT OR TEXTURED

Whether used as a durable decking-style paving tile or to create dramatic, spa-like ambience indoors, Beach Hut is undeniably striking and also comes with a flat tile to be used alongside.

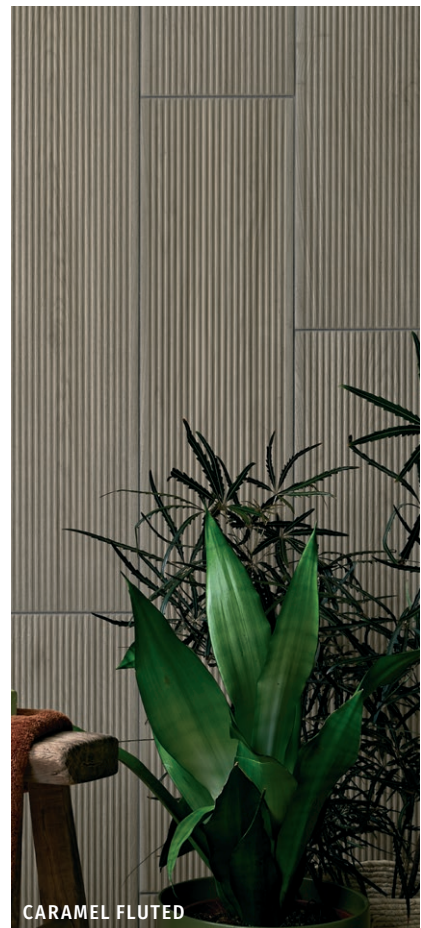

FORMAT (CM)

SOLD BY

AVAILABILITY

Plain tile suitable for interior walls and floors.
Fluted tile suitable for interior and domestic exterior walls and floors.
Slip rating: Fluted: R11, Plain: R9.

23 x 120 x 1

5 pieces (1.38m²)

Usually in stock





CARAMEL FLUTED



CARAMEL PLAIN

TECHNICAL DATA

TEST	STANDARD	RESULT
Dimensional Tolerances	EN ISO 10545-2	Within standard tolerances
Water Absorption	EN ISO 10545-3	≤0.5%
Breaking Strength	EN ISO 10545-4	1600-2400N
Deep Abrasion Resistance	EN ISO 10545-6	<130mm ³
Linear Thermal Expansion	EN ISO 10545-8	<7.0 x 10 ⁻⁶ °C ⁻¹
Thermal Shock Resistance	EN ISO 10545-9	Resistant
Resistance to Crazeing	EN ISO 10545-11	Resistant
Frost Resistance	EN ISO 10545-12	Resistant
Chemical Resistance - High Concentrations	EN ISO 10545-13	A
Chemical Resistance - Low Concentration	EN ISO 10545-13	Resistant
Stain Resistance	EN ISO 10545-14	5
Resistance to Fire	EN 9239-1	A1
Slip Rating	UNE 41901	Fluted: Class 3 Plain: Class 1
Slip Rating	DIN 51097	C
Slip Rating - Barefoot	DIN 51130	Fluted: R11 Plain: R10
Slip Rating	BS 7976-2	Fluted: PTV +36
Dynamic Coefficient of Friction	ANSI A326.3	Fluted: 0.7 Plain: 0.42

Rectified: YES NO

For any further information or advice, please contact our team.

INSTALLATION, CARE & MAINTENANCE ADVICE

Please refer to the installation guides on our website.