

COTEHELE

PORCELAIN • MATT

A versatile porcelain product that takes on a classic or contemporary look and feel depending on where it is laid, Cotehele is full of character and natural charm.



BEIGE OPUS PATTERN



GREY OPUS PATTERN



SAND OPUS PATTERN



BEIGE



GREY



SAND

FORMAT (CM)

40 x 60 x 0.95
Opus Pattern x 0.95

SOLD BY

4 pieces (0.96m²)
Repeat (0.72m²)

AVAILABILITY


Usually in stock
Usually in stock

Suitable for interior walls and floors.
Slip rating: R10






BEIGE



GREY



SAND

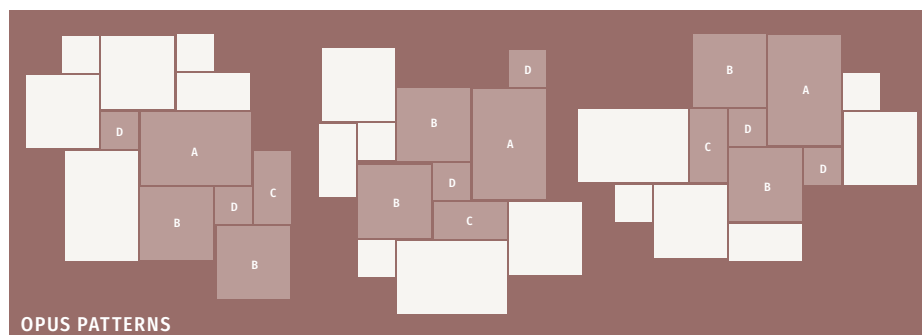

Opus patterns

With Opus it is possible to make three different patterns. Each repeat is 0.72m² with 5 tiles in each 'repeat'.

Tile	Dimensions (cm)	Quantity
A	40 x 60	1
B	40 x 40	2
C	20 x 40	1
D	20 x 20	2

TECHNICAL DATA

TEST	STANDARD	RESULT
Dimensional Tolerances	EN ISO 10545-2	Within standard tolerances
Water Absorption	EN ISO 10545-3	≤0.5%
Modulus of Rupture	EN ISO 10545-4	≥35N/mm ²
Breaking Strength	EN ISO 10545-4	≥1300N
Superficial Abrasion Resistance	EN ISO 10545-7	Class 4
Thermal Shock Resistance	EN ISO 10545-9	Resistant
Resistance to Crazeing	EN ISO 10545-11	Resistant
Frost Resistance	EN ISO 10545-12	Resistant
Chemical Resistance - Low Concentration	EN ISO 10545-13	GLA
Chemical Resistance - Households/Swimming Pool Chemicals	EN ISO 10545-13	GA
Stain Resistance	EN ISO 10545-14	≥3
Resistance to Fire	EN 9239-1	A1
Slip Rating - Critical Angle	DIN 51097	A+B
Slip Rating - Barefoot	DIN 51130	R10
Dynamic Coefficient of Friction	ANSI A137	≥0.42

Rectified: YES NO

For any further information or advice, please contact our team.

INSTALLATION, CARE & MAINTENANCE ADVICE

Please refer to our 'Understanding Unrectified Porcelain Tiles' sheet on our website for product installation advice.